




JHW6CP02T05 2T Pull Cylinder 3/8



PRODUCT DETAILS

- High strength steel construction
- One piece high grade alloy bearing for side load protection and longer life
- Polyurethane cup seal helps provide optimum performance
- External plunger threads
- Internal base threads
- Used for pulling and tensioning
- 5AS2 offers a turbo function that features high flow at high pressure condition
- 5AD15M offers a 4-way control valve for operation of double acting cylinders
- Maximum working pressure: 1, psi / 7 bar

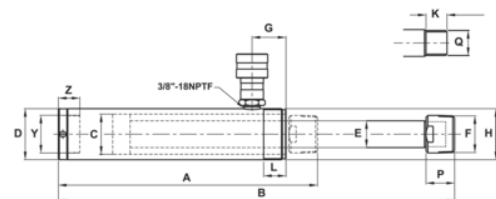

PRODUCT ATTRIBUTES

Product: **JHW6CP02T05**

	2.5 t		5 in		0.56 in
PSI	8930 psi		2.78 in ³	A	10.55 in
B	15.55 in	C	1.13 in	D	1.89 in
H	1-1/2"-16 in	L	0.98 in	K	0.76 in
Q	M16x1.5 mm	Y	3/4"-14NPTF in	Z	0.72 in
F	3/4"-14NPTF in		1.65 in	P	1.13 in