




**JHW6CP10T06**  
**10T Pull Cylinder 3/8"**





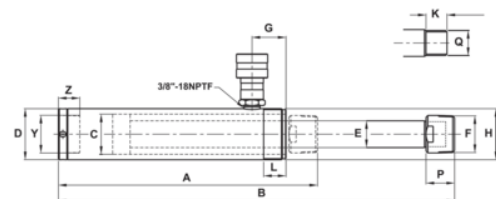


**PRODUCT DETAILS**

- High strength steel construction
- One piece high grade alloy bearing for side load protection and longer life
- Polyurethane cup seal helps provide optimum performance
- External plunger threads
- Internal base threads
- Used for pulling and tensioning
- 5AS2 offers a turbo function that features high flow at high pressure condition
- 5AD15M offers a 4-way control valve for operation of double acting cylinders
- Maximum working pressure: 1, psi / 7 bar



PRODUCT ATTRIBUTES

Product: **JHW6CP10T06**

	10 t		5.95 in		2.44 in
<b>PSI</b>	8200 psi		14.48 in <sup>3</sup>	<b>A</b>	11.75 in
<b>B</b>	17.7 in	<b>C</b>	2.17 in	<b>D</b>	3.35 in
<b>H</b>	M85x2 in	<b>L</b>	1 in	<b>K</b>	1.02 in
<b>Q</b>	M30x2 mm	<b>Y</b>	M30x2 in	<b>Z</b>	0.98 in
<b>F</b>			1.5 in	<b>P</b>	