




## 6CF Flat Body Cylinders



### PRODUCT DETAILS

- Made of high quality steel
- Extremely low collapsed height for applications with minimal clearance at the lift point
- Great for areas of low clearance
- Maximum working pressure 1, psi / 7 bar
- Flextensions are designed for use on hand and power tools (Impulse or Direct drive); NOT FOR IMPACT TOOL USE
- Maximum working torque values: 16 Ft. Lbs. / 192 In. Lbs. / 217 Nm
- Other lengths and socket sizes available by special order. Contact your Williams representative

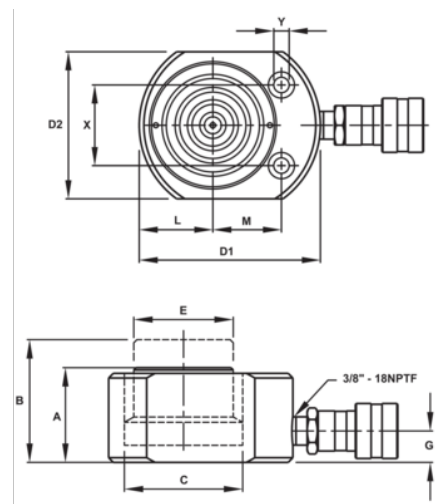

## PRODUCT ATTRIBUTES

### Product: JHW6CF05T03

|                                                                                   |          |                                                                                   |                      |                                                                                   |            |
|-----------------------------------------------------------------------------------|----------|-----------------------------------------------------------------------------------|----------------------|-----------------------------------------------------------------------------------|------------|
|  | 5 t      |  | 0.24 in              |  | 1.10 in    |
| <b>PSI</b>                                                                        | 9090 psi |  | 0.26 in <sup>3</sup> | <b>A</b>                                                                          | 1.26 in    |
| <b>B</b>                                                                          | 1.5 in   | <b>C</b>                                                                          | 1.18 in              | <b>D</b>                                                                          | 2.4x1.6 in |
| <b>E</b>                                                                          | 0.98 in  | <b>G</b>                                                                          | 0.69 in              | <b>X</b>                                                                          | 1.12 in    |
| <b>Y</b>                                                                          | 0.2 in   |  | 0.31 in              |  | 0.17 in    |
| <b>L</b>                                                                          | 0.8 in   | <b>M</b>                                                                          | 0.8 in               |  |            |

### Product: JHW6CF10T05

|                                                                                   |          |                                                                                     |                      |                                                                                     |            |
|-----------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------------------|------------|
|  | 10 t     |  | 0.43 in              |  | 2.36 in    |
| <b>PSI</b>                                                                        | 8470 psi |  | 1.01 in <sup>3</sup> | <b>A</b>                                                                            | 1.69 in    |
| <b>B</b>                                                                          | 2.12 in  | <b>C</b>                                                                            | 1.73 in              | <b>D</b>                                                                            | 3.3x2.2 in |
| <b>E</b>                                                                          | 1.5 in   | <b>G</b>                                                                            | 0.77 in              | <b>X</b>                                                                            | 1.44 in    |
| <b>Y</b>                                                                          | 0.28 in  |  | 0.42 in              |  | 0.31 in    |
| <b>L</b>                                                                          | 1.12 in  | <b>M</b>                                                                            | 1.32 in              |  |            |

### Product: JHW6CF20T05

|                                                                                   |          |                                                                                     |                      |                                                                                     |            |
|-----------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------------------|------------|
|  | 20 t     |    | 0.43 in              |    | 4.38 in    |
| <b>PSI</b>                                                                        | 9130 psi |    | 1.88 in <sup>3</sup> | <b>A</b>                                                                            | 2.01 in    |
| <b>B</b>                                                                          | 2.44 in  | <b>C</b>                                                                            | 2.36 in              | <b>D</b>                                                                            | 4.0x3.0 in |
| <b>E</b>                                                                          | 2 in     | <b>G</b>                                                                            | 0.75 in              | <b>X</b>                                                                            | 1.94 in    |
| <b>Y</b>                                                                          | 0.4 in   |  | 0.59 in              |  | 0.39 in    |
| <b>L</b>                                                                          | 1.54 in  | <b>M</b>                                                                            | 1.56 in              |  |            |

### Product: JHW6CF30T05

|                                                                                   |          |                                                                                       |                      |                                                                                       |            |
|-----------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------|----------------------|---------------------------------------------------------------------------------------|------------|
|  | 30 t     |    | 0.51 in              |    | 6.49 in    |
| <b>PSI</b>                                                                        | 9240 psi |    | 3.31 in <sup>3</sup> | <b>A</b>                                                                              | 2.31 in    |
| <b>B</b>                                                                          | 2.82 in  | <b>C</b>                                                                              | 2.87 in              | <b>D</b>                                                                              | 4.6x3.8 in |
| <b>E</b>                                                                          | 2.5 in   | <b>G</b>                                                                              | 0.79 in              | <b>X</b>                                                                              | 2.06 in    |
| <b>Y</b>                                                                          | 0.4 in   |  | 0.62 in              |  | 0.44 in    |
| <b>L</b>                                                                          | 1.88 in  | <b>M</b>                                                                              | 1.75 in              |  |            |

### Product: JHW6CF50T05

|                                                                                     |           |                                                                                     |                      |                                                                                     |            |
|-------------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------------------|------------|
|  | 50 t      |  | 0.63 in              |  | 9.86 in    |
| <b>PSI</b>                                                                          | 10140 psi |  | 6.21 in <sup>3</sup> | <b>A</b>                                                                            | 2.64 in    |
| <b>B</b>                                                                            | 3.27 in   | <b>C</b>                                                                            | 3.54 in              | <b>D</b>                                                                            | 4.5x4.5 in |
| <b>E</b>                                                                            | 2.76 in   | <b>G</b>                                                                            | 0.79 in              | <b>X</b>                                                                            | 2.62 in    |
| <b>Y</b>                                                                            | 0.43 in   |  | 0.75 in              |  | 0.5 in     |
| <b>L</b>                                                                            | 2.25 in   | <b>M</b>                                                                            | 2.13 in              |  |            |