




6CP Pull Cylinders



PRODUCT DETAILS

- High strength steel construction
- One piece high grade alloy bearing for side load protection and longer life
- Polyurethane cup seal helps provide optimum performance
- External plunger threads
- Internal base threads
- Used for pulling and tensioning
- 5AS2 offers a turbo function that features high flow at high pressure condition
- 5AD15M offers a 4-way control valve for operation of double acting cylinders
- Maximum working pressure: 1, psi / 7 bar

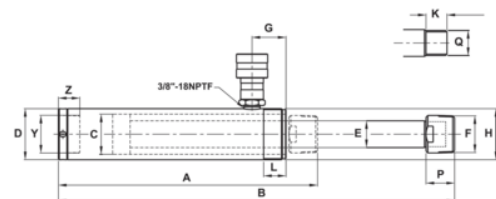

PRODUCT ATTRIBUTES

Product: JHW6CP02T05					
	2.5 t		5 in		0.56 in
PSI	8930 psi		2.78 in ³	A	10.55 in
B	15.55 in	C	1.13 in	D	1.89 in
H	1-1/2"-16 in	L	0.98 in	K	0.76 in
Q	M16x1.5 mm	Y	3/4"-14NPTF in	Z	0.72 in
F	3/4"-14NPTF in		1.65 in	P	1.13 in

Product: JHW6CP05T05					
	5 t		5.55 in		1.14 in
PSI	8770 psi		6.34 in ³	A	11.85 in
B	17.35 in	C	1.69 in	D	2.25 in
H	2-1/4"-14 in	L	1 in	K	0.93 in
Q	M28x1.5 mm	Y	1-1/4"-11.5NPTF in	Z	0.95 in
F	1-1/4"-11.5NPTF in		1.5 in	P	1.25 in

Product: JHW6CP10T06					
	10 t		5.95 in		2.44 in
PSI	8200 psi		14.48 in ³	A	11.75 in
B	17.7 in	C	2.17 in	D	3.35 in
H	M85x2 in	L	1 in	K	1.02 in
Q	M30x2 mm	Y	M30x2 in	Z	0.98 in
F			1.5 in	P	