




6CT Threaded Hole Cylinders





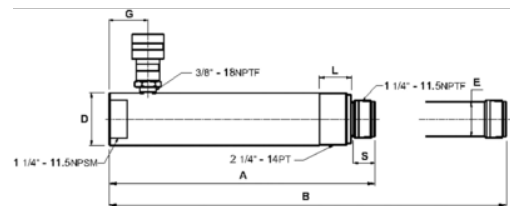

PRODUCT DETAILS

- High quality threaded single acting cylinders
- Removable threaded plunger adapter allows for the use of a variety of threaded attachments
- Used to attach accessories to rod end and base
- Maximum working pressure: 1, psi / 7 bar







PRODUCT ATTRIBUTES

Product: **JHW6CT10T06**

	10 t		5.95 in		2.24 in
PSI	8930 psi		13.33 in ³	A	11.46 in
B	17.41 in	D	2.26 in	E	1.49 in
G	1.67 in	L	1.13 in	S	0.94 in

Product: **JHW6CT10T10**

	10 t		9.96 in		2.24 in
PSI	8930 psi		22.31 in ³	A	15.47 in
B	25.43 in	D	2.26 in	E	1.49 in
G	1.67 in	L	1.13 in	S	0.94 in