

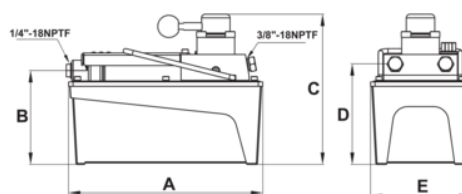


5AD Air Pumps, Double Acting






PRODUCT DETAILS

- High strength reinforced aluminum alloy reservoir is lightweight and corrosion resistant
- Pressure relief valve for overload protection
- Suggested air pressure range: 90-175 psi / 6-12 bar
- Designed to be used with single acting cylinders
- Dust cover protection for the release control valve
- Dual stage release control valve



PRODUCT ATTRIBUTES

Product	PSI		A	B	C	D	E			PSI
JHW5AD150M	10000 psi	91.5 in ³	10.35 in	5 in	7.99 in	5.35 in	5.35 in	66 in ³ /min	11 in ³ /min	100-200 psi