

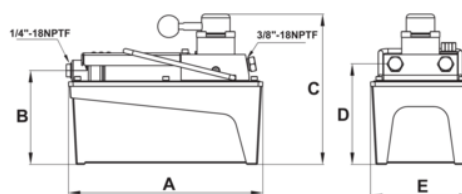


5AS Air Pumps, Single Acting






PRODUCT DETAILS

- High strength reinforced aluminum alloy reservoir is lightweight and corrosion resistant
- Pressure relief valve for overload protection
- Suggested air pressure range: 90-175 psi / 6-12 bar
- Designed to be used with single acting cylinders
- Dust cover protection for the release control valve
- Dual stage release control valve



PRODUCT ATTRIBUTES

| Product | PSI |  | A | B | C | D | E |  |  | PSI |
|-------------------|--------------|---|-------------|------------|------------|------------|------------|---|---|----------------|
| JHW5AS150 | 10000 psi | 91.5 in ³ | 10.35 in | 5 in | 7.28 in | 5.16 in | 5.35 in | 66 in ³ /min | 11 in ³ /min | 100-200 psi |
| JHW5AS150L | 10000 psi | 91.5 in ³ | 10.98 in | 6.3 in | 8.03 in | 5.12 in | 5.35 in | 61 in ³ /min | 10 in ³ /min | 100-200 psi |
| JHW5AS200 | 10000 psi | 122.1 in ³ | 11.57 in | 6.02 in | 7.91 in | 6.18 in | 5.98 in | 65 in ³ /min | 12 in ³ /min | 100-200 psi |
| JHW5AS380 | 10000 psi | 231.9 in ³ | 12.64 in | 5.08 in | 7.36 in | 5.24 in | 7.36 in | 65 in ³ /min | 11 in ³ /min | 100-200 psi |
| JHW5AS380L | 10000 psi | 231.9 in ³ | 12.64 in | 6.42 in | 8.15 in | 5.2 in | 7.36 in | 61 in ³ /min | 10 in ³ /min | 100-200 psi |
| JHW5AS60 | 10000 psi | 36.6 in ³ | 16.54 in | 9.84 in | 7.01 in | 6.18 in | 5.59 in | 61 in ³ /min | 9 in ³ /min | 100-200 psi |