




5ES Electric Pumps With Solenoid Valve





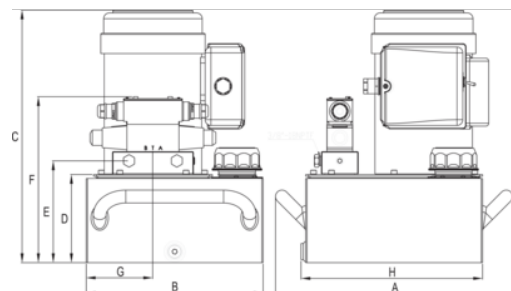


PRODUCT DETAILS

- Quiet operation meets OSHA regulations (80dBA)
- Ideal for applications where a remote control is required
- 2 speed operations allows for faster cylinder advance
- Full load starting capabilities
- Internal filter keeps contamination from damaging pump
- 1 foot hand held remote controls the solenoid valve
- Designed to minimize the number of moving parts and maximize overall pump efficiency
- Ideal for on site construction as well as maintenance








PRODUCT ATTRIBUTES






Product: **JHW5ES05H1G**

lb	61.5 lb	PSI	350 psi	PSI	10,000 psi
A	12.74 in	B	10.26 in	C	19.1 in
D	4.72 in	E	5.65 in	G	8.07 in
H	12.32 in		293 in ³ /min		18 in ³ /min
	3-way,3-position		Advance/Hold/Return		9 A
V	115 V				






Product: **JHW5ES05H1GR**

lb	61.5 lb	PSI	350 psi	PSI	10,000 psi
A	16.1 in	B	12.01 in	C	17.13 in
D	5.98 in	E	6.9 in	G	4.51 in
H	12.32 in		293 in ³ /min		18 in ³ /min
	4-way,3-position		Advance/Hold/Return		9 A
V	115 V				






Product: **JHW5ES05H2G**

lb	65.3 lb	PSI	350 psi	PSI	10,000 psi
A	12.74 in	B	10.26 in	C	19.1 in
D	4.72 in	E	5.65 in	G	8.07 in
H	12.32 in		293 in ³ /min		18 in ³ /min
	3-way,3-position		Advance/Hold/Return		9 A
V	115 V				






Product: **JHW5ES05H2GR**

lb	65.3 lb	PSI	350 psi	PSI	10,000 psi
A	16.1 in	B	12.01 in	C	19.78 in
D	7.28 in	E	8.2 in	G	4.51 in
H	12.32 in		293 in ³ /min		18 in ³ /min
	4-way,3-position		Advance/Hold/Return		9 A
V	115 V				






Product: **JHW5ES10H2G**

lb	72.6 lb	PSI	700 psi	PSI	10,000 psi
A	17.88 in	B	12.01 in	C	17.88 in
D	5.98 in	E	6.9 in	G	4.51 in
H	12.32 in		311 in ³ /min		37 in ³ /min
	3-way,3-position		Advance/Hold/Return		12 A
V	115 V				






Product: **JHW5ES10H2GR**

lb	72.6 lb	PSI	700 psi	PSI	10,000 psi
A	16.1 in	B	12.01 in	C	19.78 in
D	7.28 in	E	8.2 in	G	4.51 in
H	12.32 in		311 in ³ /min		37 in ³ /min
	4-way,3-position		Advance/Hold/Return		12 A
V	115 V				






Product: **JHW5ES15H3G**

lb	90.4 lb	PSI	700 psi	PSI	10.000 psi
A	17.88 in	B	12.01 in	C	17.88 in
D	5.98 in	E	6.9 in	G	4.51 in
H	12.32 in		470 in ³ /min		61 in ³ /min
	3-way,3-position		Advance/Hold/Return		17 A
V	115 V				






Product: **JHW5ES15H3GR**

lb	72.6 lb	PSI	700 psi	PSI	10.000 psi
A	16.1 in	B	12.01 in	C	24.78 in
D	12.28 in	E	13.2 in	G	4.51 in
H	12.32 in		470 in ³ /min		61 in ³ /min
	4-way,3-position		Advance/Hold/Return		17 A
V	115 V				

Product: **JHW5ES15H5G**

lb	98 lb	PSI	700 psi	PSI	10.000 psi
A	16.1 in	B	12.01 in	C	17.13 in
D	5.98 in	E	6.9 in	G	4.51 in
H	12.32 in		470 in ³ /min		61 in ³ /min
	3-way,3-position		Advance/Hold/Return		17 A
V	115 V				

Product: **JHW5ES15H5GR**

lb	98 lb	PSI	700 psi	PSI	10.000 psi
A	16.1 in	B	12.01 in	C	24.78 in
D	12.28 in	E	13.2 in	G	4.51 in
H	12.32 in		470 in ³ /min		61 in ³ /min
	4-way,3-position		Advance/Hold/Return		17 A
V	115 V				