




## 5ExxHxGR Electric Pumps With Pendant Switch







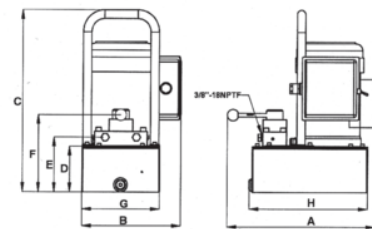

### PRODUCT DETAILS

- Quiet operation meets OSHA regulations (80dBA)
- 2 speed operation allows for faster cylinder advance
- Full load starting capacities
- Internal filter keeps contamination from damaging pump
- 1 foot hand held remote control allows user to control cylinder in up or down position
- May be used with air or electric impact wrench for extra speed and turning power









# PRODUCT ATTRIBUTES







**Product: JHW5E05H1GR**

<b>lb</b>	59.5 lb	<b>PSI</b>	350 psi	<b>PSI</b>	10.000 psi
<b>A</b>	14.92 in	<b>B</b>	10.28 in	<b>C</b>	19.1 in
<b>D</b>	4.72 in	<b>E</b>	5.67 in	<b>F</b>	7.99 in
<b>G</b>	8.07 in	<b>H</b>	12.36 in		1 gal
	293 in <sup>3</sup> /min		18 in <sup>3</sup> /min		3-way,3-position
	Advance/Hold/Return		9 A	<b>V</b>	115 V

**Product: JHW5E10H2GR**

<b>lb</b>	70.5 lb	<b>PSI</b>	700 psi	<b>PSI</b>	10.000 psi
<b>A</b>	16.65 in	<b>B</b>	12.01 in	<b>C</b>	17.83 in
<b>D</b>	5.94 in	<b>E</b>	6.89 in	<b>F</b>	9.21 in
<b>G</b>	4.53 in	<b>H</b>	12.36 in		2 gal
	397 in <sup>3</sup> /min		37 in <sup>3</sup> /min		3-way,3-position
	Advance/Hold/Return		12 A	<b>V</b>	115 V

**Product: JHW5E15H3GR**

<b>lb</b>	88.5 lb	<b>PSI</b>	700 psi	<b>PSI</b>	10.000 psi
<b>A</b>	16.65 in	<b>B</b>	12.01 in	<b>C</b>	19.72 in
<b>D</b>	7.24 in	<b>E</b>	8.19 in	<b>F</b>	10.51 in
<b>G</b>	4.53 in	<b>H</b>	12.36 in		3 gal
	476 in <sup>3</sup> /min		61 in <sup>3</sup> /min		3-way,3-position
	Advance/Hold/Return		17 A	<b>V</b>	115 V