




501MRMH - 10005MFRMH
Metal Handle Click Type Torque
Wrenches - Dual Scale with Loop
Wire







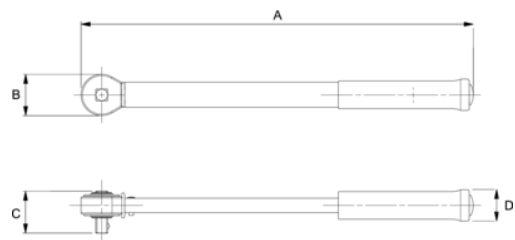



PRODUCT DETAILS

- Tools complete with Tools@Height attachment Point
- Dual scale, calibrated dual direction
- Positive lock with spring loaded pull down lock ring
- Fast, accurate and easy to set
- Easy-to-read laser marked scales
- Most feature quick release buttons which provide good socket retention as well as easy socket removal
- Accuracy: $\pm 3\%$ cw $\pm 4\%$ ccw of indicated value, cw, from 2% to 1% of full scale
- Accuracy: $\pm 4\%$ CW $\pm 6\%$ CCW of indicated value, CW, from 2% to 1% of full scale
- Meets or exceeds ASME standards, ISO 6789 standards
- Individually serialized with matching certificate of calibration traceable to N.I.S.T










PRODUCT ATTRIBUTES

Product: **2503MFRMH-TH**

	1 ozf.in		1.4 lbf.in		
	30-250 lbf.ft		47-332 N.m		3.15 lb
	1/2 in	A	24.4 in	B	1.7 in
C	1.4 in	D	1.4 in		

Product: **6004MFRMH-TH**

	5 ozf.in		6.8 lbf.in		
	120-600 lbf.ft		162-813 N.m		11.85 lb
	3/4 in	A	42 in	B	2.5 in
C	2 in	D	1.15 in	