



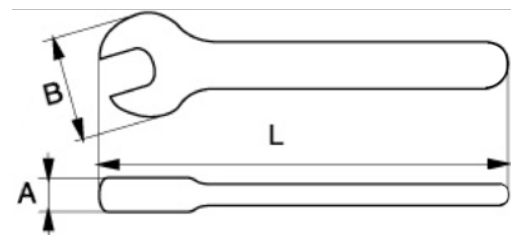
## 6MV Insulated Open End Wrenches





### PRODUCT DETAILS

- Dip-coated insulation
- 2-Layer colour insulation coating 6 mm to 16 mm wrenches
- 3-Layer colour insulation coating 17 mm to 32 mm wrenches
- For working on live equipment up to 1000 V according to IEC 60900
- Made of high performance alloy steel
- Opening tolerance according to ISO 691
- 2-3 Multi-layer coating with different colours indicating safety, danger or high danger. Plus a 4th one in black to further protect handle edges
- This provides protection as well as creating a visual warning system
- If the outer insulation layer gets damaged, the lighter colour underneath will become visible and warn the user
- Each and every tool is tested to 10.000V for 10 seconds at the end of the manufacturing cycle

1000 V  
IEC60900



## PRODUCT ATTRIBUTES

Product		<b>L</b>	<b>A</b>	<b>B</b>	
<b>6MV-8</b>	8 mm	92 mm	4 mm	18 mm	40 g
<b>6MV-9</b>	9 mm	98 mm	4 mm	21 mm	45 g
<b>6MV-10</b>	10 mm	108 mm	5 mm	24 mm	55 g
<b>6MV-11</b>	11 mm	116 mm	5 mm	26 mm	60 g
<b>6MV-12</b>	12 mm	125 mm	5.5 mm	28 mm	70 g
<b>6MV-13</b>	13 mm	135 mm	5.5 mm	31 mm	75 g
<b>6MV-14</b>	14 mm	140 mm	6 mm	31 mm	85 g
<b>6MV-15</b>	15 mm	150 mm	6 mm	33 mm	90 g
<b>6MV-16</b>	16 mm	157 mm	6.5 mm	34 mm	105 g
<b>6MV-17</b>	17 mm	162 mm	6.5 mm	37 mm	120 g
<b>6MV-18</b>	18 mm	170 mm	7 mm	39 mm	145 g
<b>6MV-19</b>	19 mm	175 mm	7 mm	42 mm	150 g